



# J-260-58AN-SL

## MOUNTING STYLE - CLAMPING FLANGE (CF)

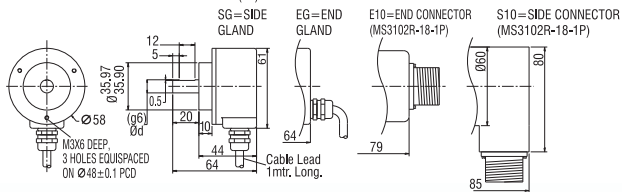

## MOUNTING STYLE - SQUARE FLANGE (SF)

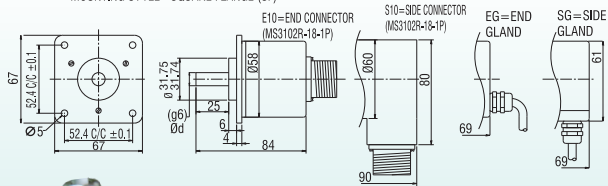

All dimensions are in mm with a tolerance of  $\pm 0.1$  unless otherwise specified



- Versatile model having many options
- High axial & radial load capacity
- Constructed to withstand the demands of rough and tough industrial environment

### Channels

R = ABZ / Q = AB / A = A

### Output

HV = Driver (10mA Source/Sink) without inverted channels  
 HVLD = Driver (10mA Source/Sink) with inverted channels  
 PP = Driver (50mA Source/Sink) without inverted channels  
 PPLD/HTL = Driver (50mA Source/Sink) with inverted channels  
 OC = Open Collector without inverted channels  
 TTL/RS422 = Driver (10mA Source/Sink) with inverted channels at 5vdc

### PPR

see ppr option below

### Voltage

V1 = 5 VDC / V2 = 10-28 VDC / V3 = 5-28 VDC

### Shaft Size $\varnothing$ d

6 = 6mm / 10 = 10mm / X = Special

### Mounting Style

CF = Clamping Flange  
 SF = Square Flange

### Protection

1 = IP50 / 2 = IP65

### Temperature

S = 0-70°C

### Connection

EG = End Gland / SG = Side Gland /

### Location

E10 = 10 pin End Connector / S10 = 10pin Side Connector

### CE Certified

N = Standard / CE = CE Certified

Ordering Example – J-260-58AN-SL-R-HVLD-1000-V2-6-CF-1-S-SG-N

### Model J-260-58AN-SL PPR Options

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46,48,50,54,55,60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122,125,128,130,136,144,146,148,150,156,157,160,164,170,171,172,176,180,200,210,240,250,256,276,300,305,360,480,500,512,597,600,720,750,800,840,960,1000,1024,1080,1200,1250,1270,1500,2000,2048,2500,3000,4096,5000,6000,7200,8192 & 10000