


# J-260-58BN-SL

**JENCODER**<sup>TM</sup>  
THE PERFECT CODER



All dimensions are in mm with a tolerance of  $\pm 0.1$  unless otherwise specified

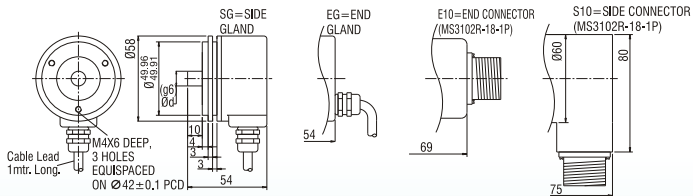

- Versatile model having many options
- Exact retrofit replacement for majority of machine tool spindle encoder
- Constructed to withstand the demands of rough & tough industrial environment

<b>Channels</b>	R = ABZ / Q = AB / A =A	
<b>Output</b>	HV	= Driver (10mA Source/Sink) without inverted channels
	HVLD	= Driver (10mA Source/Sink) with inverted channels
	PP	= Driver (50mA Source/Sink) without inverted channels
	PPLD/HTL	= Driver (50mA Source/Sink) with inverted channels
	OC	= Open Collector without inverted channels
	TTL/RS422	= Driver (10mA Source/Sink) with inverted channels at 5vdc
<b>PPR</b>	see ppr option below	
<b>Voltage</b>	V1 = 5 VDC / V2 = 10-28 VDC / V3 = 5-28 VDC	
<b>Shaft Size Ø d</b>	6 = 6mm / 10 = 10mm / X = Special	
<b>Protection</b>	1=IP50 / 2=IP65	
<b>Temperature</b>	S=0-70°C	
<b>Connection</b>	EG = End Gland / SG = Side Gland /	
<b>Location</b>	E10 = 10 pin End Connector / S10 = 10pin Side Connector	
<b>CE Certified</b>	N = Standard / CE = CE Certified	

Ordering Example – J-260-58BN-SL-R-HVLD-1000-V2-6-1-S-SG-N

#### Model J-260-58BN-SL PPR Options

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46,48,50,54,55,60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122,125,128,130,136,144,146,148,150,156,157,160,164,170,171,172,176,180,200,210,240,250,256,276,300,305,360,480,500,512,597,600,720,750,800,840,960,1000,1024,1080,1200,1250,1270,1500,2000,2048,2500,3000,4096,5000,6000,7200,8192 & 10000